





Stainless steel basket insert with flap




Boiler float gauge

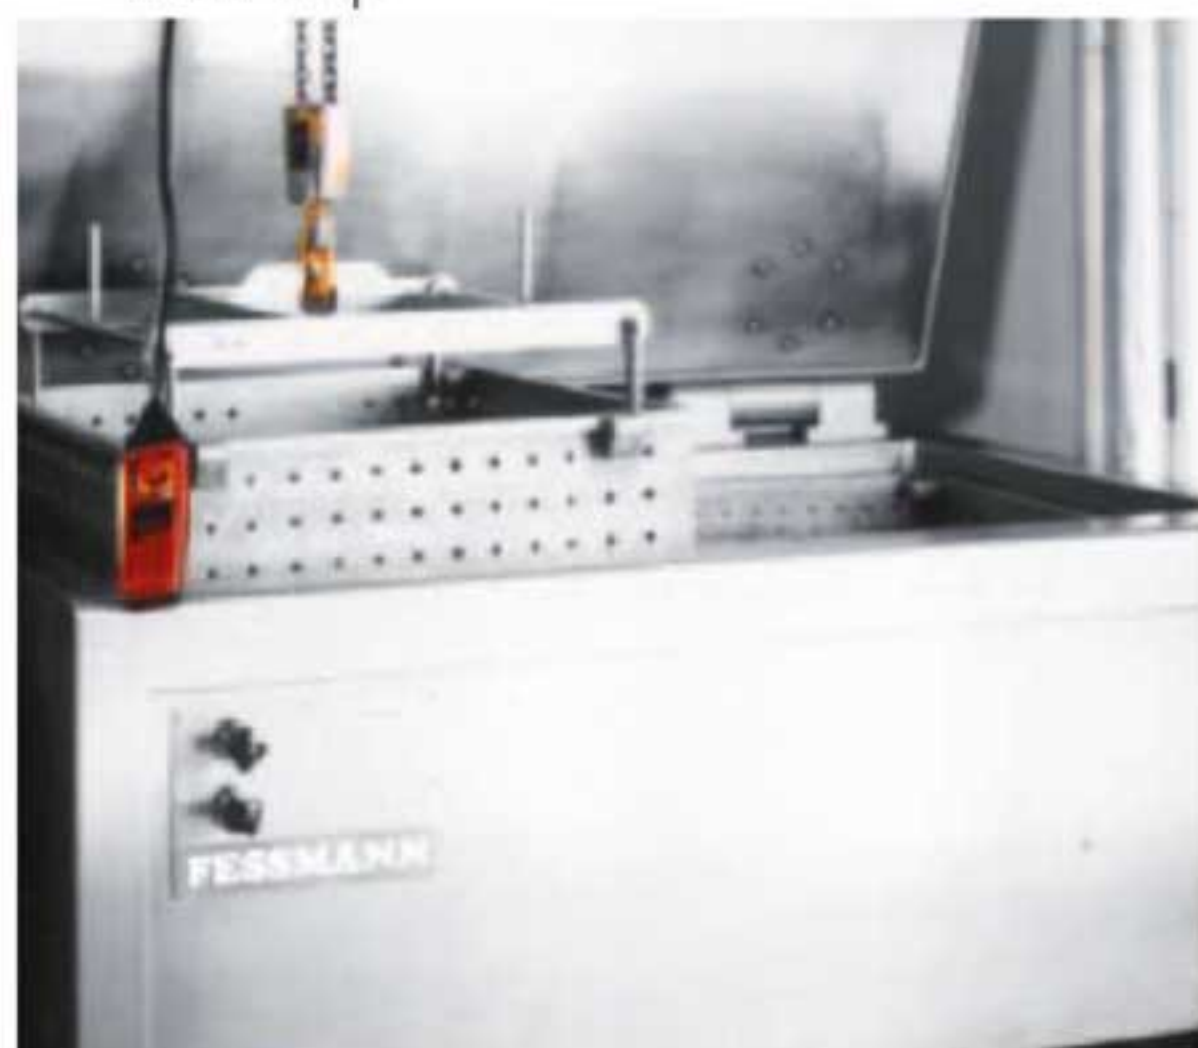

Stainless steel floor insert

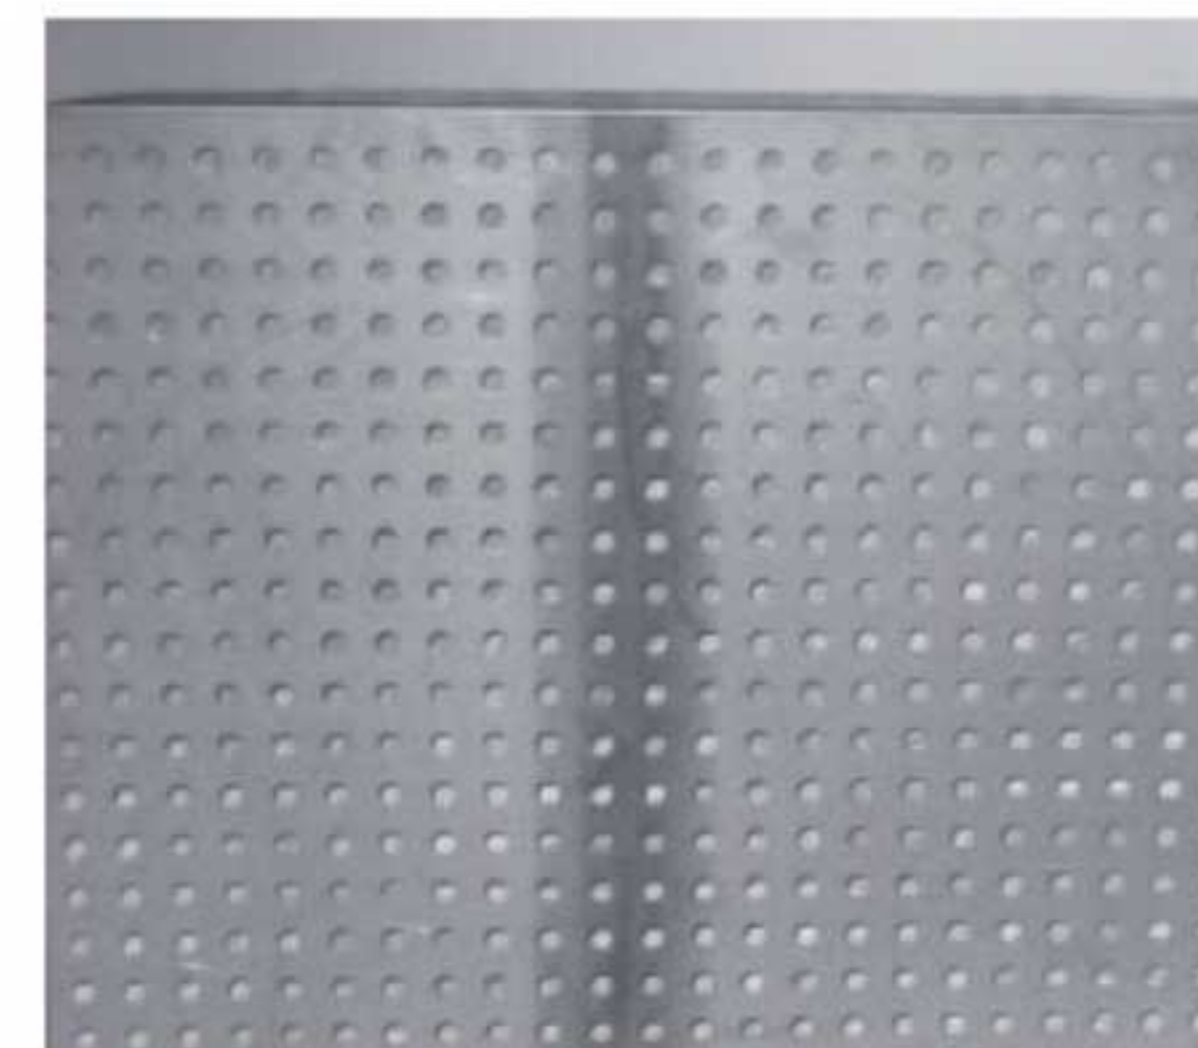

Insulated boiler lid

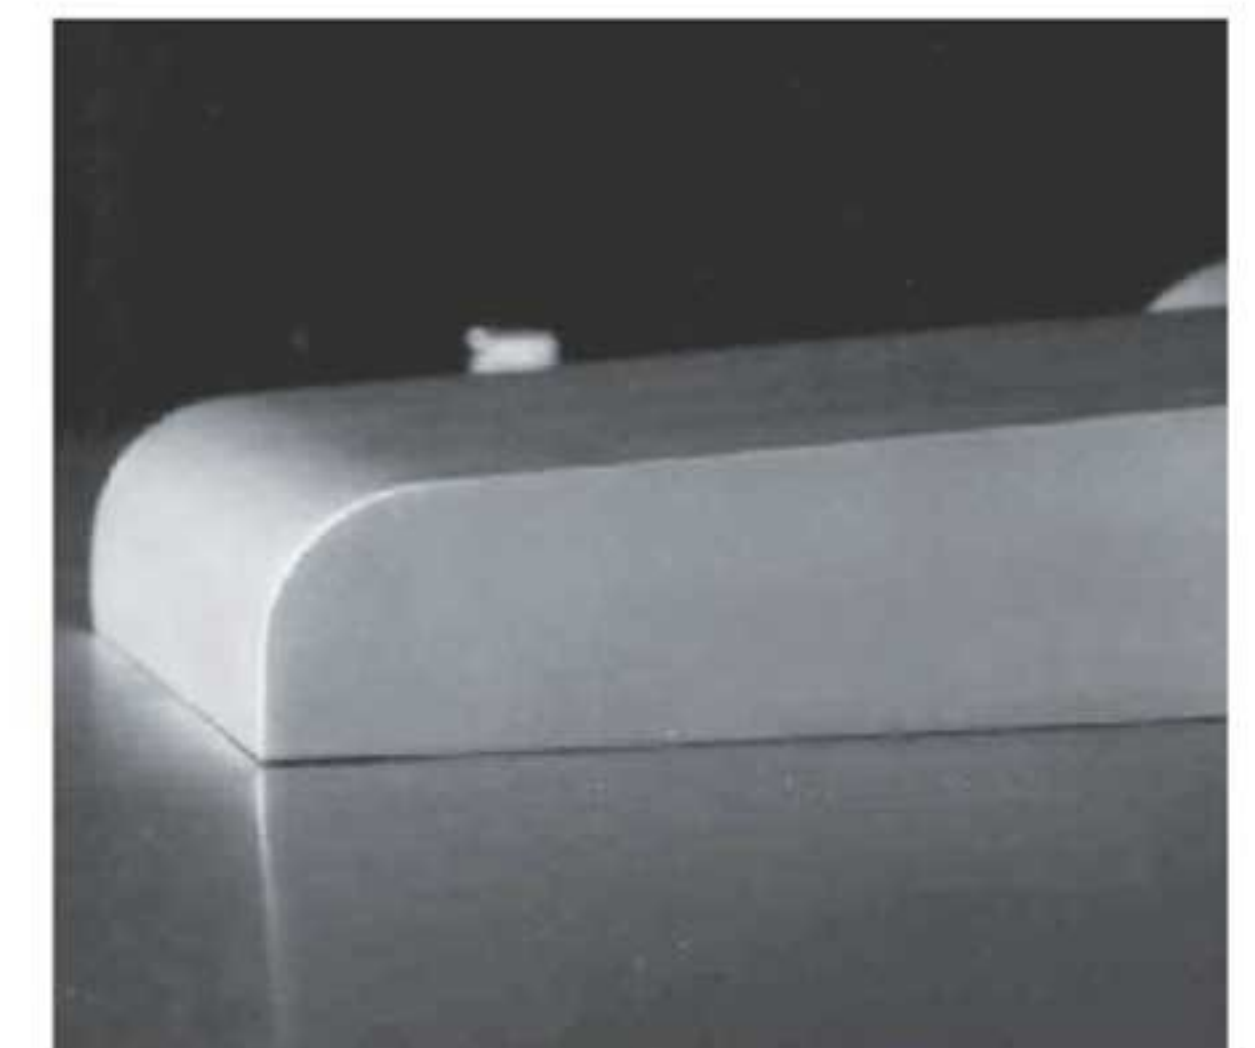



Nothing boils over – except your excitement for the product

Quality has never been this energy-efficient! Thanks to its unique heat insulation, the **NOVA boiler** not only uses energy very effectively, it also distributes the heat evenly across the entire boiler bottom, which ensures the consistently high quality of all products. For you, this means: increased quality at a lower cost.

The boiler is available in holding capacities between 300 and 1000 litres. And it uses not only water for boiling! You have the choice between electric, gas, oil (300 l, 400 l, 600 l) and high-pressure steam heat (600 l, 1000 l). Its special hygienic stainless steel design and the dirt-repellent edge make this boiler a true cleanliness miracle.

With the standard DP-K control, you can easily regulate pre-select times, cooking temperatures and treatment periods - your success is guaranteed.

By the way: FESSMANN cooking boiler systems are always equipped with standard inlet valves for hot and cold water and are delivered as prefabricated units. Optionally, the system is also available with the core temperature function.

Technical data

BOILER		GR2	GR3	GR4	GR5	GR6
DIMENSIONS		300 L	400 L	600 L	600 L	1000 L
Floor space HP heat (W x D) outside cm		100x122	130 x 122	130 x 122	165x122	200x122
Floor space HP heat (W x D) inside cm		80x80	110x80	110x88	145x88	180x88
HEATING CAPACITY						
Connection value for HP heat	kW	-	85	127	127	215
Connection value for EL heat	kW	17,6	24,2	28,6	28,6	-
Connection value for gas/oil heat	kW	34	37	-	43	-

